

The **60 lb class Pneumatic breaker RMT 1230** is most suitable for challenging works such as cutting tarmac, breaking reinforced concrete, frozen ground, non-consolidated rock, boulders, pavement, asphalt etc. It is used for demolition, construction, renovation, road construction, bridge work and repairs. All the daily service points are easily accessible so it is really fast and easy to maintain the hammer.



What is good about it?

- 100% parts interchangeability
- Forged latch type retainer
- Integral oil chamber in backhead
- Easy access to daily service points
- Four-bolt backhead – withstands rugged use
- “Goose neck” Air Inlet Swivel for easy handling and positioning

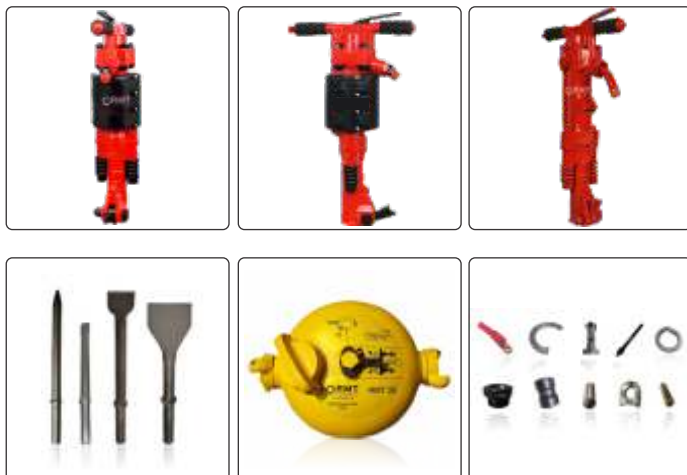
Where it is used?

- Tough construction and plant maintenance work
- Medium to heavy concrete demolition
- Breaking reinforced concrete, heavy road work & general demolition

Specification

Model #	RMT 1230 (60 lb Class)	
Weight with silencer	30 kg	66 lb
Weight without silencer	29 kg	64 lb
Length	660 mm	26"
Air pressure	6 bar	87 psi
Air consumption	30 l/s	64 cfm
Blows per minute	1350	
Piston dia	60.3 mm	2.40"
Piston stroke	140 mm	5.50"
Air inlet (BSP thread)	19 mm	¾"
Shank size (standard) - T022159	32 x 160 mm	1¼" x 6¼"
Shank size (option) - T022158	28 x 160 mm	1½" x 6¼"
Retainer type	Latch	

*Available with or without noise reducing silencer / muffler


Working Tools
Lubricator
Spare Parts