

Used in Mining and Construction industries, **RMT 1240** demolition tools are engineered to deliver the power and durability necessary for a variety of construction and plant maintenance applications such as breaking heavy and reinforced concrete, frozen ground, asphalt, boulders and pavement.



What is good about it?

- 100% parts interchangeability
- Four-bolt backhead – withstands rugged use
- Forged latch type retainer
- Integral oil chamber provides continuous lubrication
- Easy access to daily service points
- Heavy-duty fronthead springs reduce reaction back to operator
- Reversible piston reduces maintenance cost
- “Goose neck” Air Inlet Swivel for easy handling and positioning


Where it is used?

- Extra Heavy Duty Concrete Demolition
- Consolidating and ramming backfill and earth

Specification

Model #	RMT 1240 (90 lb class)	
Weight with silencer	40 kg	88 lb
Weight without silencer	39 kg	86 lb
Length	718 mm	28.25"
Air pressure	6 bar	87 psi
Air consumption	38 l/s	81 cfm
Blows per minute	1250	
Piston dia	67 mm	2.63"
Piston stroke	158 mm	6.25"
Air inlet (BSP thread)	19 mm	¾"
Shank size (standard)	32 x 160 mm	1¼" x 6¼"
Shank size (option)	28 x 160 mm	1⅝" x 6¼"
Retainer type	Latch	

*Available with or without noise reducing silencer / muffler

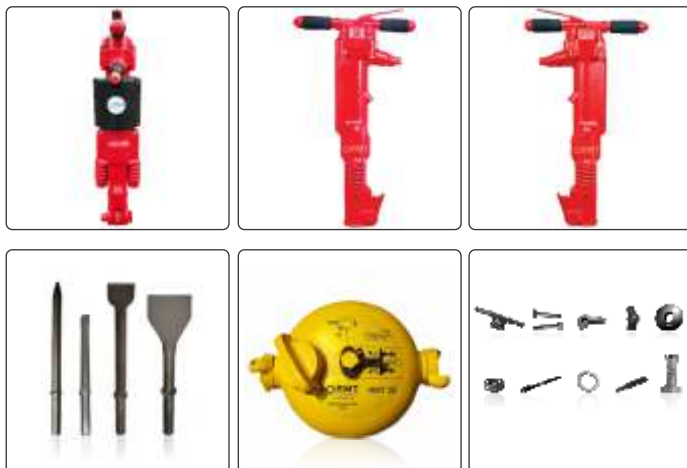

Working Tools

Lubricator

Spare Parts