

Weighing around 80 lb (37 kg) RMT 117 Pneumatic Breaker delivers powerful blow with low air consumption, making it an economical tool for the owner. The breaker has in-built lubrication mechanism which provides continuous lubrication to the internal parts of the tool. Two – bolt backhead and use of spring retainer has made this construction tool lighter in proportion to its hard blows and lesser air consumption. Favorite tool for the user and owner.



### What is good about it?

- 100% parts interchangeability
- In-built lubrication system
- Easy access to daily service points
- Easily manoeuvrable


### Where it is used?

- Tough construction and plant maintenance work
- Medium to heavy concrete demolition
- Breaking reinforced concrete, heavy road work & general demolition.

### Specification

Model #	RMT 117	
Weight with silencer	37 kg	81 lb
Weight without silencer	36 kg	80 lb
Length	710 mm	28"
Air pressure	6 bar	87 psi
Air consumption	35 l/s	74 cfm
Blows per minute	1200	
Piston dia	57 mm	2¼"
Piston stroke	165 mm	6½"
Air inlet (BSP thread)	19 mm	¾"
Chuck size T022092 (Standard)	32 x 160 mm	1¼" x 6¼"
Chuck size T022093 (Option)	28 x 160 mm	1⅝" x 6¼"
Retainer type	Spring	

\*Available with or without noise reducing silencer / muffler

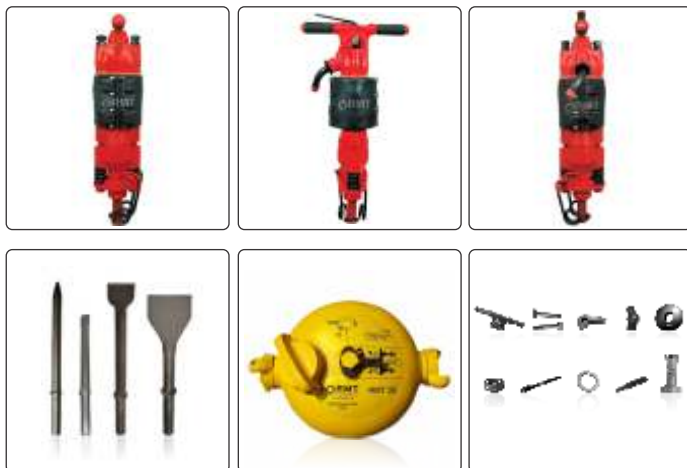

Working Tools

Lubricator

Spare Parts